


EXPLODED DIAGRAM

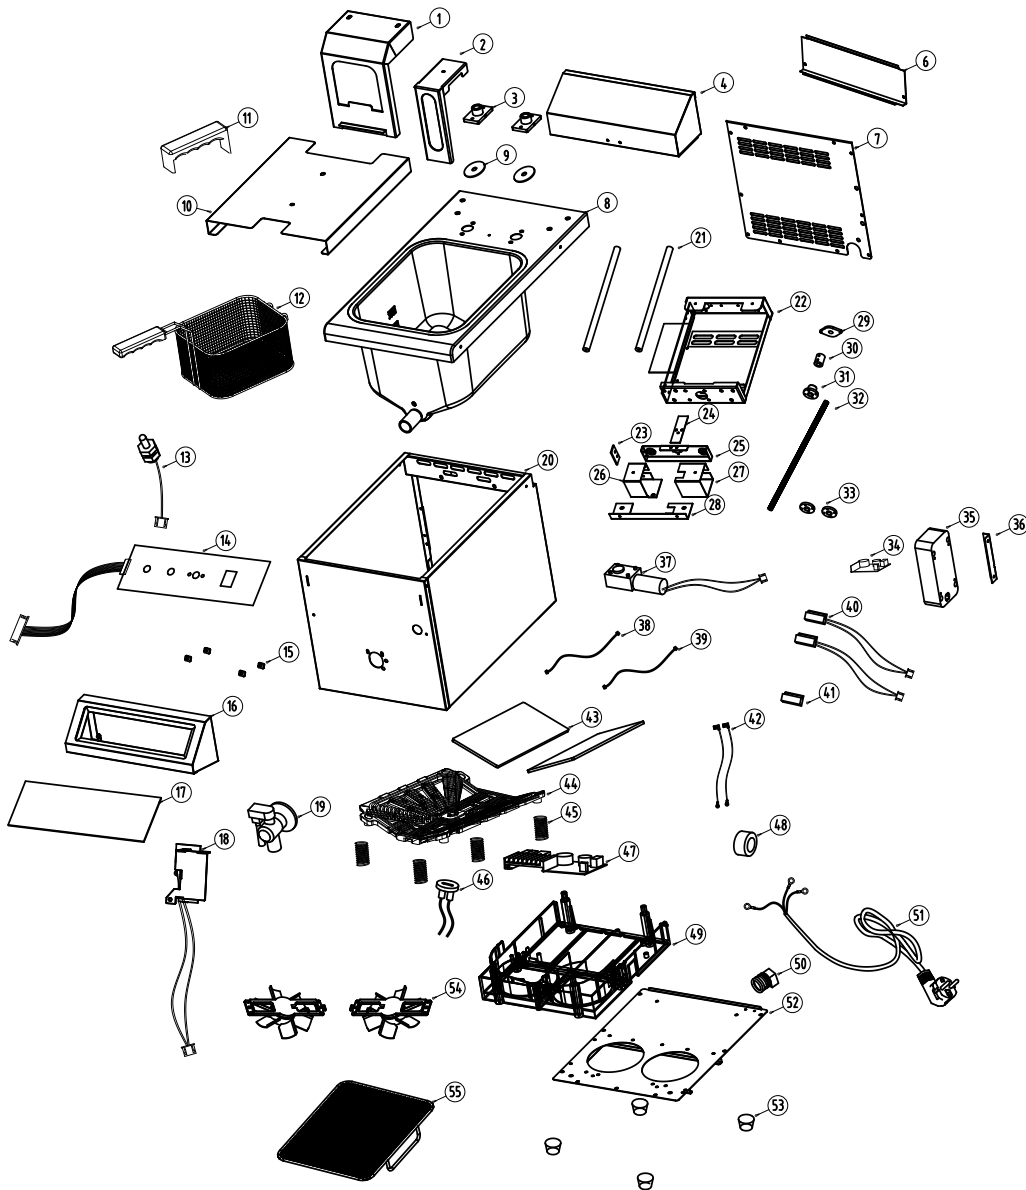

- 1.Lifting assembly part
- 2.Lifting plate
- 3.Nylon circular pipe
- 4.Back box
- 6.Back of the Back box
- 7.Back plate
- 8.Tank
- 9.Through-hole protection pad
- 10.Lid
- 11.Handle
- 12.Fry basket
- 13.Oil temperature sensor
- 14.Control panel
- 15.Control panel supporter
- 16.Control box
- 17.Control panel glass
- 18.Liquid expansion thermostat
- 19.Tap
- 20.Stainless steel body
- 21.Solid pipe
- 22.Pipe supporter
- 23.PCB FR-4
- 24.Limit plate
- 25.Pipe fixed plate
- 26.Motor holder 1
- 27.Motor holder 2
- 28.Motor fixed plate
- 29.Diamond shaped seat
- 30.Alloy high-elastic coupling
- 31.Copper nut
- 32.Screw shaft
- 33.Copper sleeve bearing
- 34.Power panel
- 35.Control plastic box
- 36.Control box fastener
- 37.Lifting motor
- 38.600mm protection wire
- 39.800mm protection wire
- 40.Magnet switch
- 41.Magnet
- 42.Connect wire
- 43.Heating coil ceramic glass
- 44.Heating coil
- 45.Spring
- 46.Heating coil sensor
- 47.Main board
- 48.Magnet ring
- 49.Inner plastic case
- 50.T-shaped locker
- 51.Power cord
- 52.Bottom plate
- 53.Foot
- 54.Fan
- 55.Fryer Screen