


GMG CATERING EQUIPMENT	**ÜRÜN ADI / PRODUCT**	**TARİH / DATE**	**DETAY RESİM - A** **DETAIL PICTURE - A**
	PB2M - 128	29/08/2018	**SAYFA NO: 1 / 6** **PAGE NO.: 1 / 6**


PB2M - 128

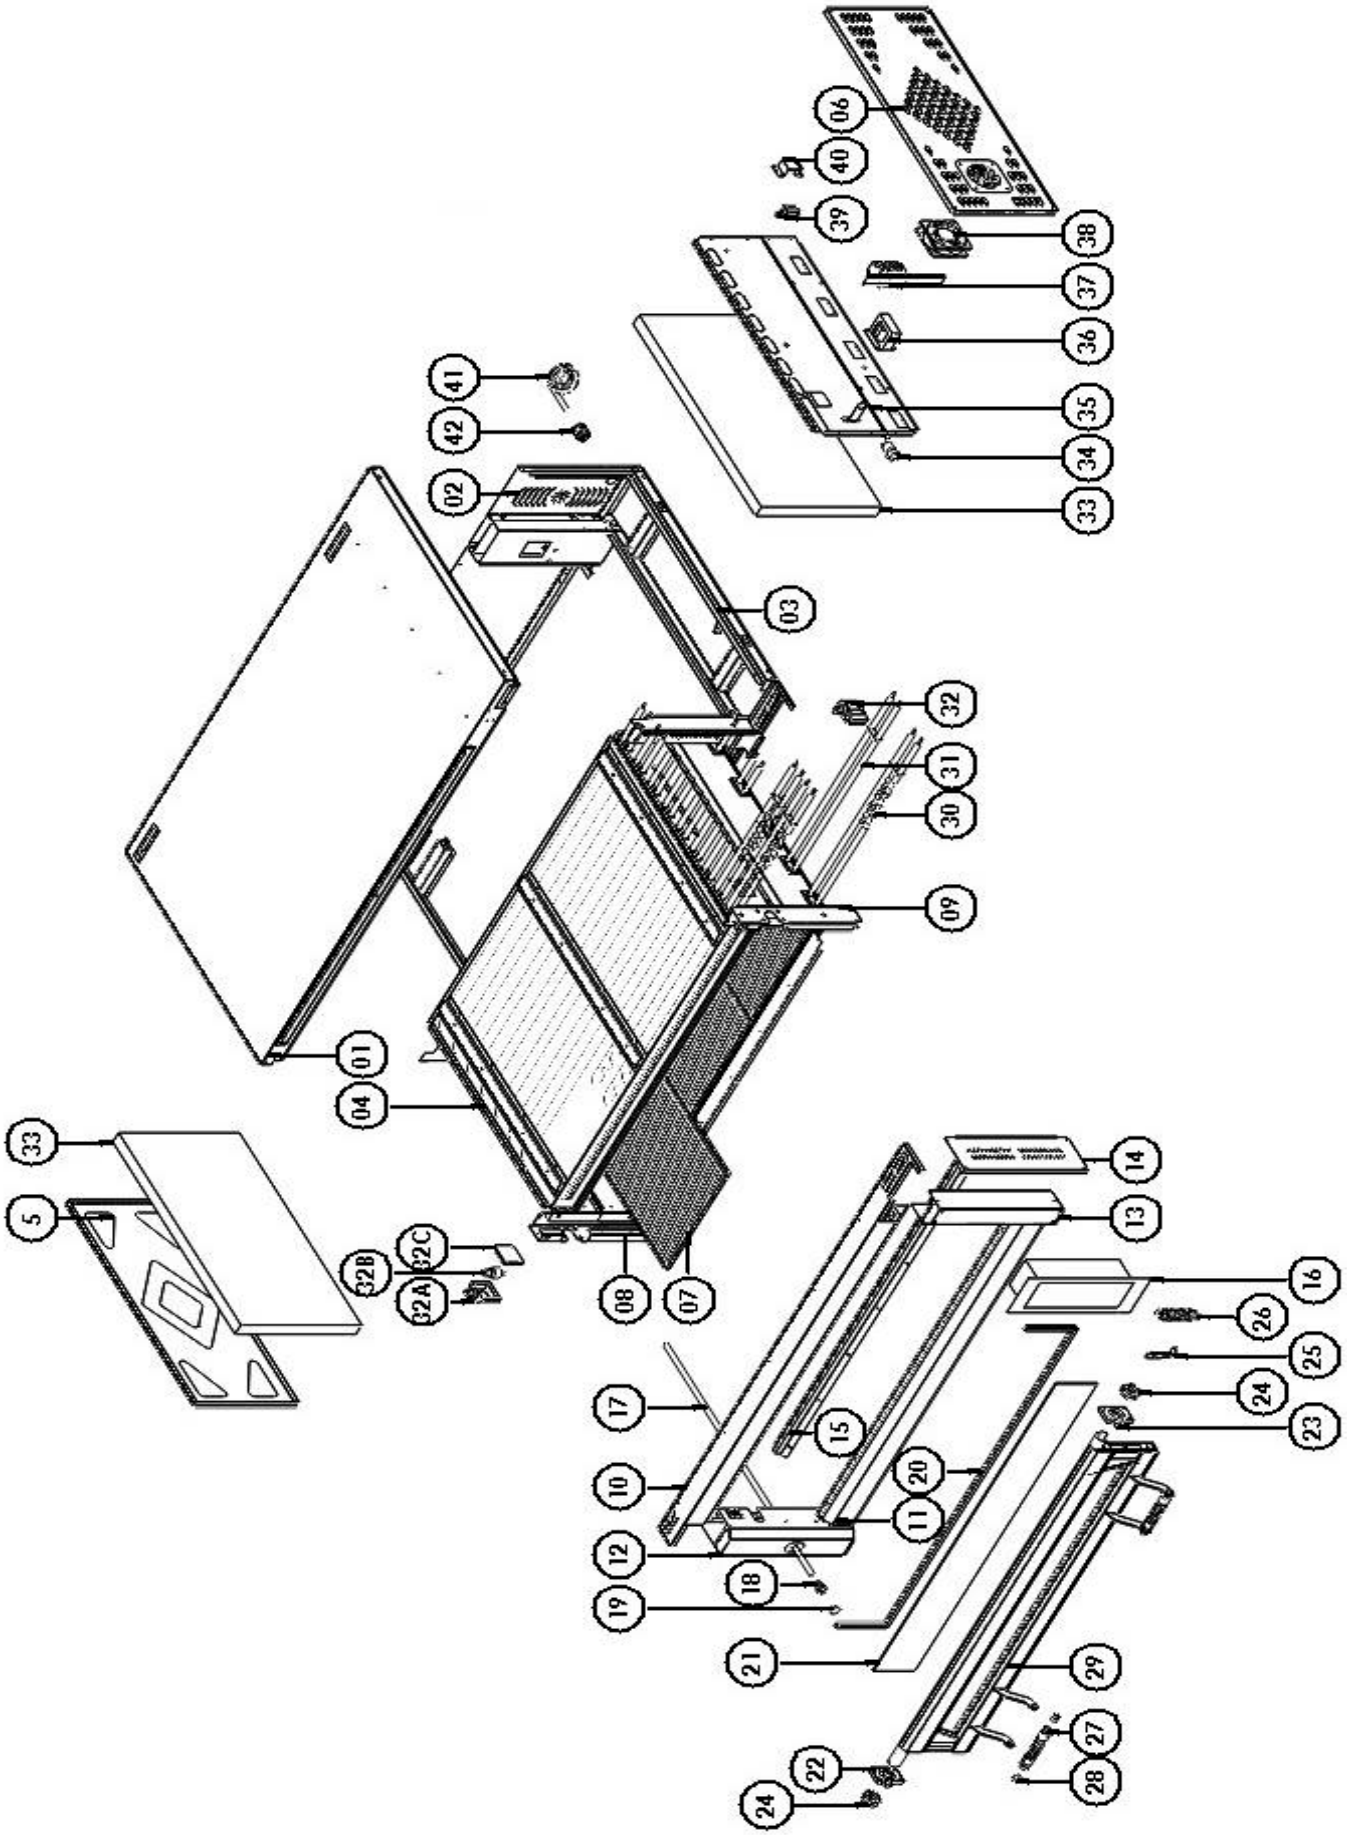


Dış Ölçüler / Outside Dim.	1262 x 1297 x 1947 mm.
İç Ölçüler / Inside Dim.	2 x 1240 x 840 x 140 mm.
Pişirme Alanı / Baking Arena	2 x (3 x (80x40 cm.) , 6 x (40x40 cm.) , 4 x (60x40 cm.) , 6 x (Ø 40 cm.))
Pişirme Taşı Ölçüleri / Baking Stone Dim.	2 x (3 x (820 x 410 x 14 mm.))
Termostat Aralığı (°C) / Thermostat Interval (°C)	2 x (85 - 455 °C (1 ad. Bağımsız / 1 pcs. Independent))
Aydınlatma / Illumination	2 x (2 ad. 25 W. / 2 pcs. 25 W.)
Toplam Elektrik Gücü / Total Power (kW)	2 x (3 x 1100 W. + 11 x 900 W. = 13.200 W.)
Besleme Gerilimi / Supply Voltage (V/A)	2 x (400 V 3F+N / 3 x 35 A.)
Besleme Kablosu / Supply Cable	5 x 4 H07RN-F
İç Tesisat Kabloları / Internal Cable	SİAF 2,5 mm²
İzolasyon / Insulatıon	Taş Yünü / Rock Wool
Ağırlık / Weight	560 Kg.


NO.	AÇIKLAMA	DESCRIPTION	ÜRÜN NO. / ITEM NO	ADET / PCS.
1	GÖVDE ÜST	UPPER BODY	PB2M128-01	2
2	GÖVDE ARKA	REAR BODY	PB2M128-02	2
3	GÖVDE ALT	LOWER BODY	PB2M128-03	2
4	PİŞİRME KAZANI	BAKING CHAMBER	PB2M128-04	2
5	SOL YAN KAPAK	COVER LEFT SIDE	PB2M128-05	2
6	SAĞ YAN KAPAK	COVER RIGHT SIDE	PB2M128-06	2
7	PİŞİRME TAŞI	BAKING STONE	PB2M128-07	6
8	KAPAK MEKANİZMA DİREĞİ SOL	LEFT RID MECHANISM	PB2M128-08	2
9	KAPAK MEKANİZMA DİREĞİ SAĞ	RIGHT RID MECHANISM	PB2M128-09	2
10	ÖN ÜST PASLANMAZ	UPPER FRONT STAINLESS	PB2M128-10	2
11	ÖN ALT PASLANMAZ	LOWER FRONT STAINLESS	PB2M128-11	2
12	ÖN SAĞ PASLANMAZ	RIGHT FRONT STAINLESS	PB2M128-12	2
13	ÖN SOL PASLANMAZ	LEFT FRONT STAINLESS	PB2M128-13	2
14	PANEL YUVASI SOL PASLANMAZ	LEFT PANEL SLOT STAINLESS	PB2M128-14	2
15	TAŞ ÇITASI	STONE LATH	PB2M128-15	2
16	KONTROL PANELİ	CONTROL PANEL	PB2M128-16	2
17	BACA HAREKET MİLİ	CHIMNEY MOTION SHAFT	PB2M128-17	2
18	BACA ALÜMİNYUMU	CHIMNEY ALUMİNUM	PB2M128-18	2
19	BACA TUTAMAĞI	CHIMNEY HANDLE	PB2M128-19	2
20	KAPAK CAM FİTİLİ	COVER GASKET	PB2M128-20	2
21	GÖZETLEME CAMI	SIGHT GLASS	PB2M128-21	2
22	SOL RULMAN YATAĞI	LEFT ROLLER BEARING	PB2M128-22	2
23	SAĞ RULMAN YATAĞI	RIGHT ROLLER BEARING	PB2M128-23	2
24	RULMAN	ROLLER	PB2M128-24	4
25	KAPAK YAY TUTUCU	SPRING HOLDER COVER	PB2M128-25	2
26	KAPAK YAYI	COVER SPRING	PB2M128-26	2
27	KAPAK TUTAMAĞI	COVER HANDLE	PB2M128-27	4
28	KAPAK TUTAMAĞI SABİTLEYİCİ CİVATA	COVER HANDLE FIXING SCREW	PB2M128-28	8
29	ÖN KAPAK	FRONT COVER	PB2M128-29	2
30	ÖN REZİSTANS	FRONT RESISTANCE	PB2M128-30	6
31	ARKA REZİSTANS	BACK RESISTANCE	PB2M128-31	22
32	AYDINLATMA LAMBASI	LIGHTING LAMP	PB2M128-32	4
32A	DUY	SOCKET	PB2M128-32A	4
32B	AMPÜL	BULB	PB2M128-32B	4
32C	LAMBA CAMI	LAMP GLASS	PB2M128-32C	4
33	İZOLASYON	INSULATION	PB2M128-33	2
34	SESLI UYARICI	BUZZER	PB2M128-34	2
35	ELEKTRİK MONTAJ PANOSU	ELECTRICAL ASSEMBLY PANEL	PB2M128-35	2
36	KONTROL PANELİ TRAFOSU	CONTROL PANEL TRANFORMER	PB2M128-36	2
37	KONTAKTÖR GRUBU	CONTACTOR GROUP	PB2M128-37	2
38	HAVALANDIRMA FANI	VENTILATING FAN	PB2M128-38	2
39	EMNİYET TERMOSTATI	SAFETY THERMOSTAT	PB2M128-39	2
40	EMNİYET TERMOSTATI KUTUSU	SAFETY THERMOSTAT BOX	PB2M128-40	2
41	BESLEME KABLOSU	FEEDING CABLE	PB2M128-41	2
42	RAKOR	FEEDING CABLE SOCKET	PB2M128-42	2


PB2M - 128			
		Dış Ölçüler / Outside Dim.	1620 x 945 x 890 mm.
		Kapasite / Capacıty	(18 ad. / pcs.) x 40 x 60 Tava / Tray
		Termostat Aralığı (°C) / Thermostat Interval (°C)	30 - 90 °C
		Aydınlatma / Illumination	1 ad. 25 W. / 1 pcs. 25 W.
		Toplam Elektrik Gücü / Total Power (kW)	3 x 1000 W. = 3000 W.
		Besleme Gerilimi / Supply Voltage (V/A)	220 V F+N / 14 A.
		Besleme Kablosu / Supply Cable	3 x 1,5 H07RN-F
		İç Tesisat Kabloları / Internal Cable	SİAF 2,5 mm²
		Ağırlık / Weight	175 Kg.

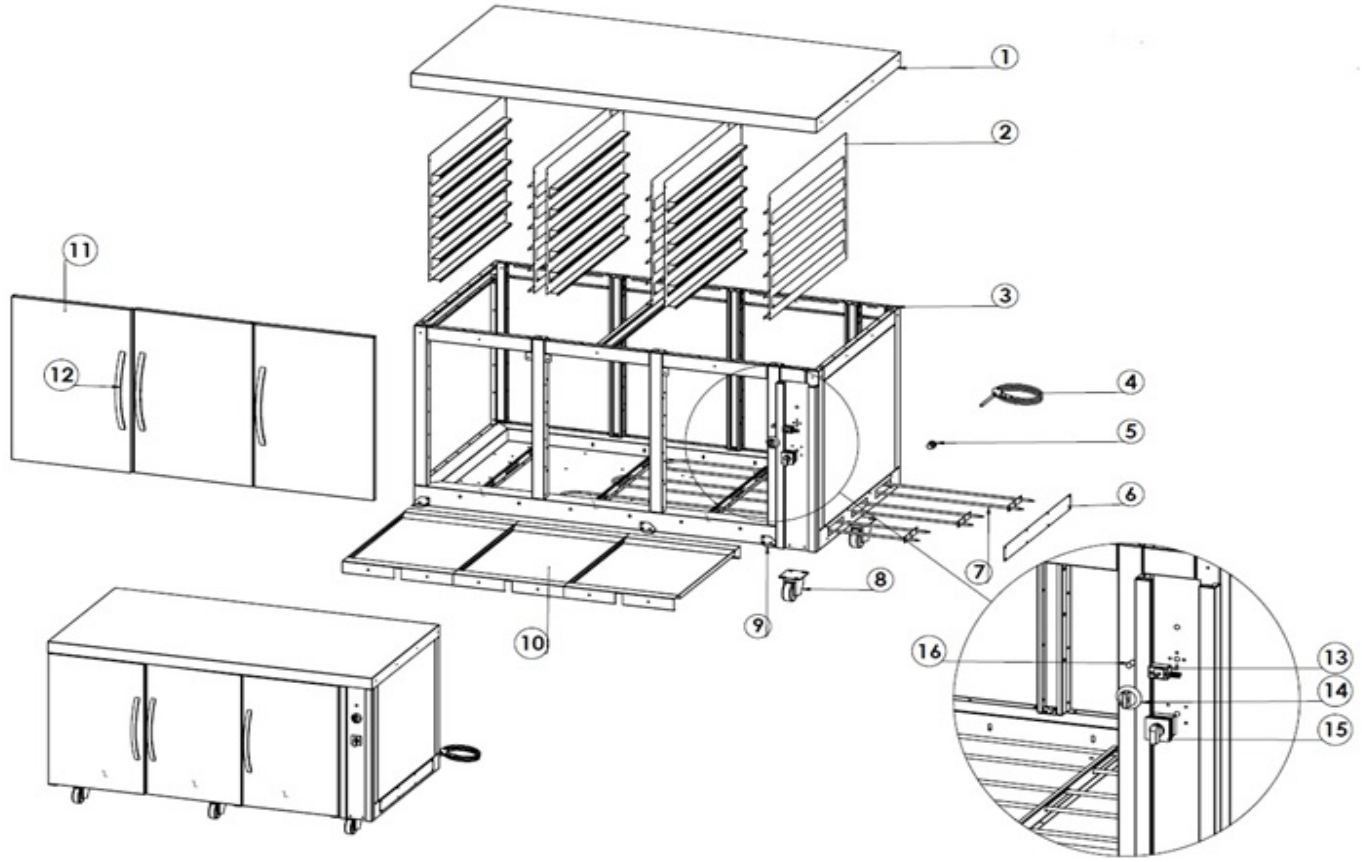


NO.	AÇIKLAMA	DESCRIPTION	ÜRÜN NO. / ITEM NO	ADET / PCS.
1	ÜST TABLA	TOP TABLE	PB2M128-101	1
2	TEPSİ RAFI	TRAY SHELF	PB2M128-102	6
3	GÖVDE	MAIN BODY	PB2M128-103	1
4	BESLEME KABLOSU	FEEDING CABLE	PB2M128-104	1
5	RAKOR	FEEDING CABLE SOCKET	PB2M128-105	1
6	REZİSTANS KAPAĞI	RESISTANCE COVER	PB2M128-106	1
7	REZİSTANS	RESISTANCE	PB2M128-107	3
8	TEKERLEK	WHEEL	PB2M128-108	6
9	MENTEŞE	HINGE	PB2M128-109	3
10	ALT TAVA	LOWER PAN	PB2M128-110	3
11	KAPAK	COVER	PB2M128-111	3
12	TUTMA KULPU	HOLD HANDLE	PB2M128-112	3
13	TERMOSTAT	THERMOSTAT	PB2M128-113	1
14	TERMOSTAT DÜĞMESİ	THERMOSTAT BUTTON	PB2M128-114	1
15	ŞALTER DÜĞMESİ	POWER SWITCH BUTTON	PB2M128-115	1
16	TERMOSTAT LAMBASI	THERMOSTAT LAMP	PB2M128-116	1

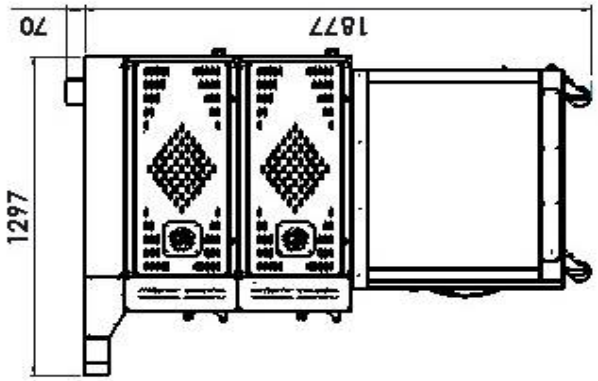

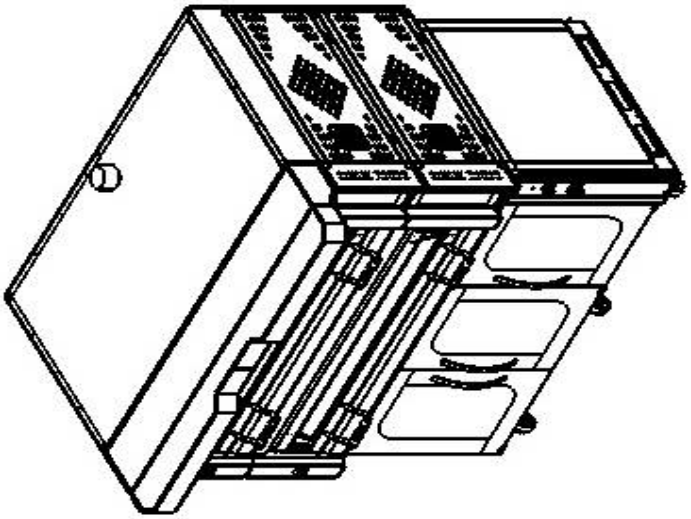

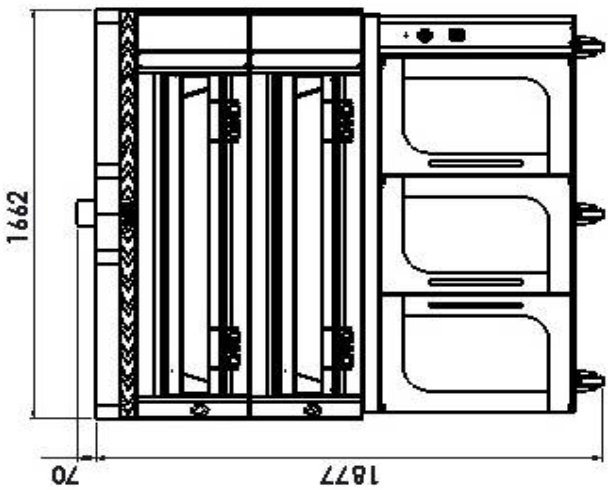


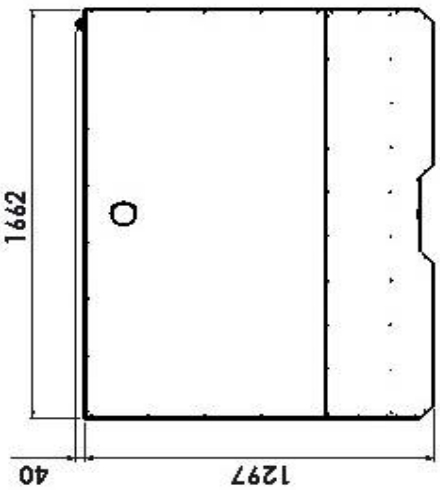

GMG CATERING EQUIPMENT	**ÜRÜN ADI / PRODUCT**	**TARİH / DATE**	**ÖLÇÜLENDİRME MEASUREMENTS**
	PB2M - 128	29/08/2018	**SAYFA NO: 4 / 6 PAGE NO.: 4 / 6**


ÜRÜN ADI / PRODUCT	TARİH / DATE	ELEKTRİK ŞEMASI - A ELECTRICAL DIAGRAM - A
PB2M - 128	29/08/2018	SAYFA NO: 5 / 6 PAGE NO.: 5 / 6

PBF 128 PASTA BÖREK FIRINI - ELEKTRİK ŞEMASI
PBF 128 BAKERY & PASTRY OVENS - ELECTRICAL DIAGRAM

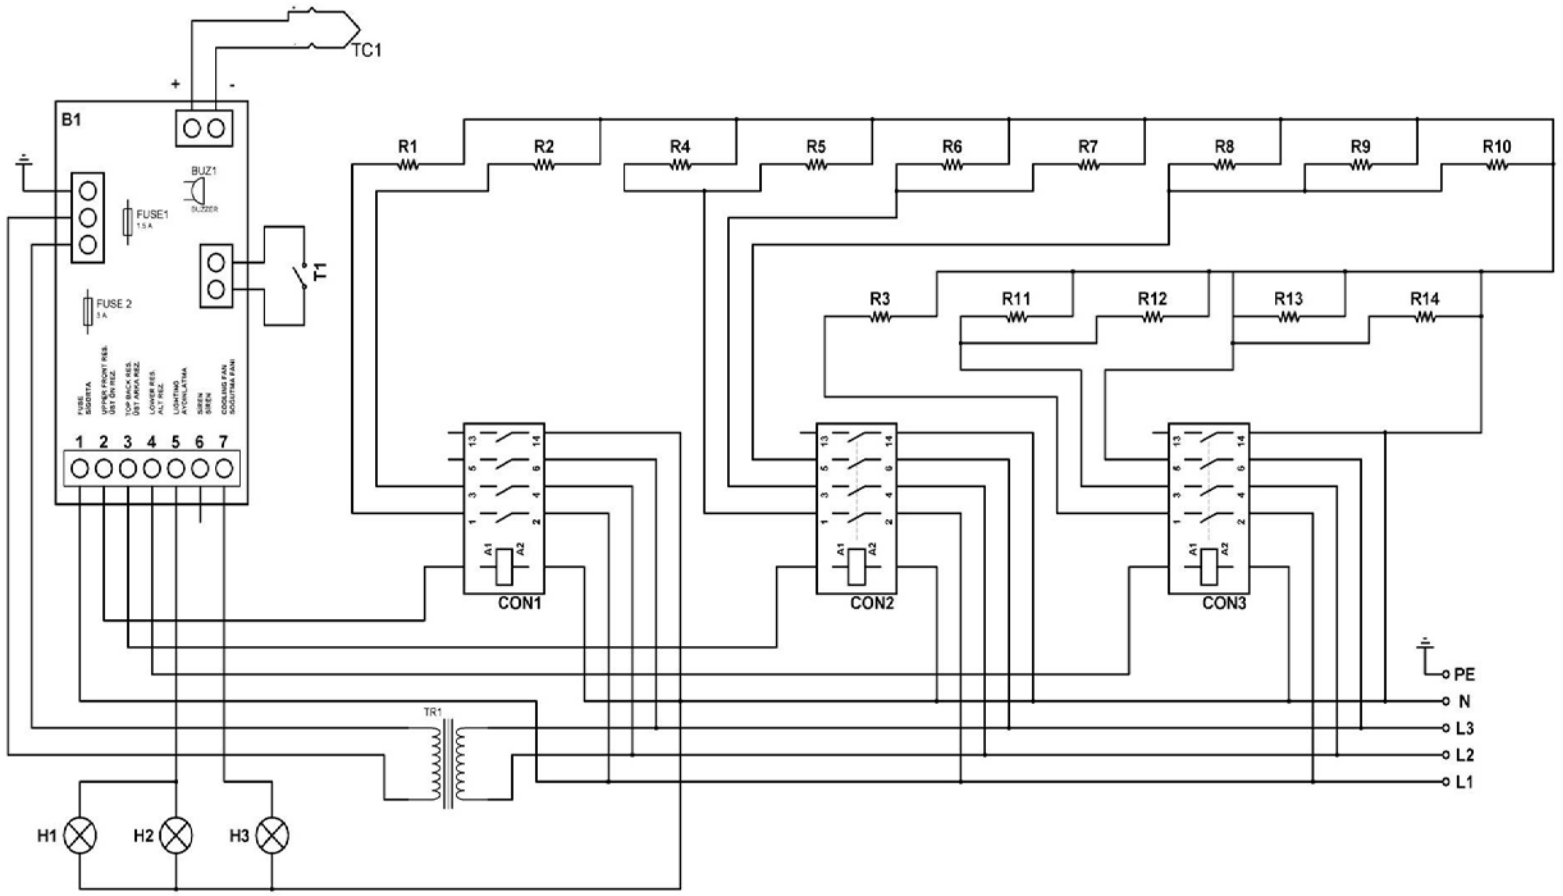

NO	AÇIKLAMA	NO	AÇIKLAMA	NO	AÇIKLAMA	NO	AÇIKLAMA
R1 - R2 - R3	Rezistans / Resistance (1100 W)	CON 1 - CON 2 - CON 3	Kontaktör / Contactor	T1	Termostat / Thermostat (85 - 455 °C)	TR1	Trafo 380 V - 24 V. 1 A Transformer 380 V - 24 V. 1A
NO	AÇIKLAMA	NO	AÇIKLAMA	NO	AÇIKLAMA	NO	AÇIKLAMA
R4 ... R14	Rezistans / Resistance (900 W)	H1 - H2	İç Aydınlatma Lambası Interior Lighting Lamp (25W)	H3	Soğutma Fanı Cooling Fan	TC 1	Termokupl - J Tipi Thermocouple - Type J
NO	AÇIKLAMA						
B1	Dijital Kontrol Kartı Digital Control Board						

PB2M 128 MAYALAMA KABINI - ELEKTRİK ŞEMASI
PB2M 128 FERMENTATION CABINET - ELECTRICAL CIRCUIT DIAGRAM

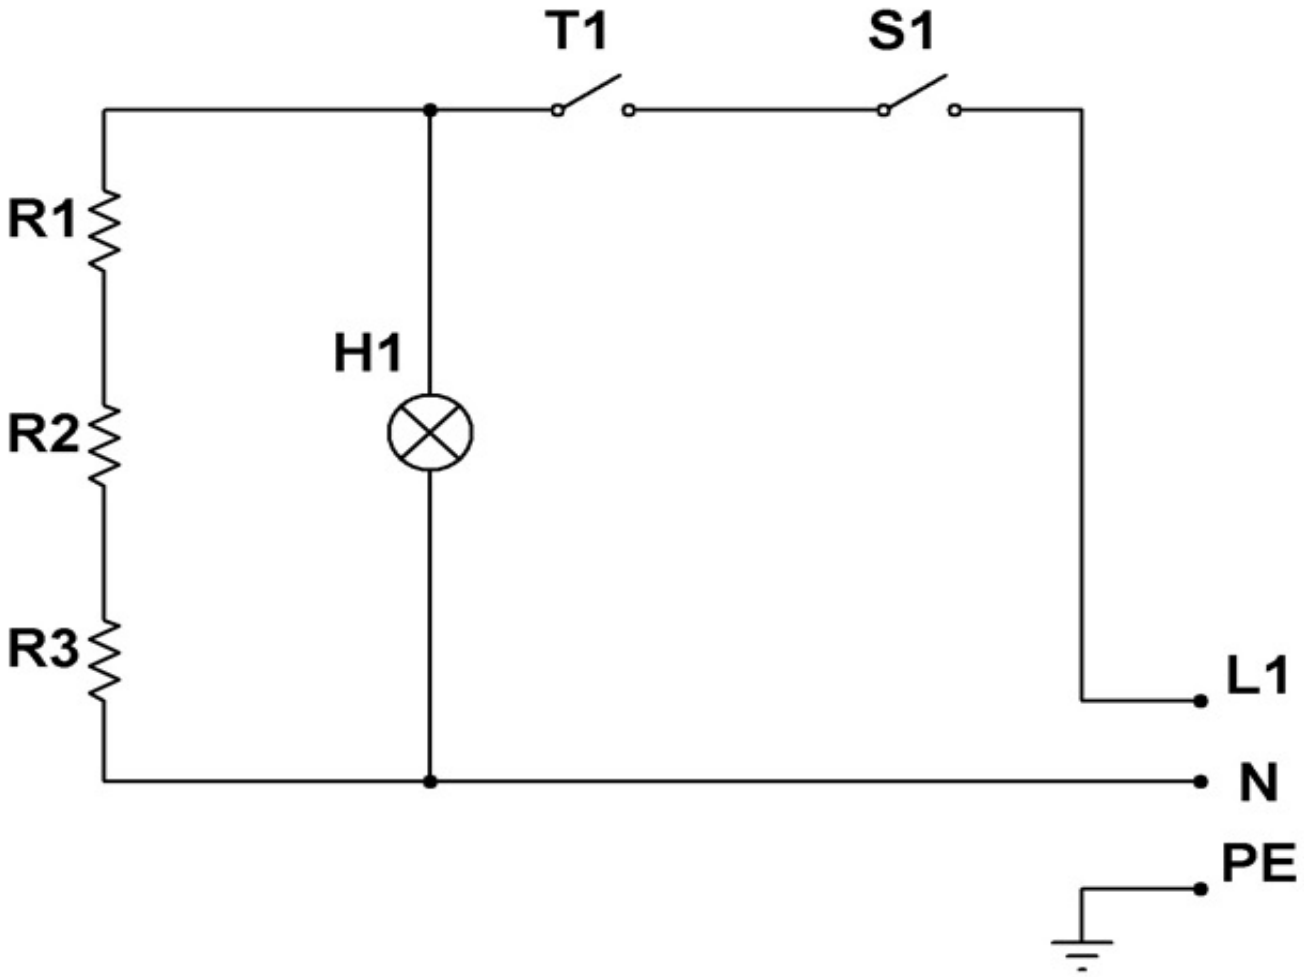

NO	AÇIKLAMA / DESCRIPTION	NO	AÇIKLAMA / DESCRIPTION
R1 ... R3	Rezistans / Resıstance (1000 W)	S1	Şalter / Power Switch
T1	Termostat / Thermostat (30 - 90 °C)	H1	Termostat Kontrol Lambası Thermostat Control Lamps